

# CMX-FMC-1001 Fiber Media Converter Gigabit Ethernet 1000Base-T to 1000Base-SX/LX SFP



### **FEATURES**


Fiber	SFP Port
FL	Fiber Link Indicator LED
PWR	Power Indicator LED
1	RJ45 Port
2	RJ45 Port
DC 5V	Power Supply Port





SFPs are not included

# **SPECIFICATIONS**

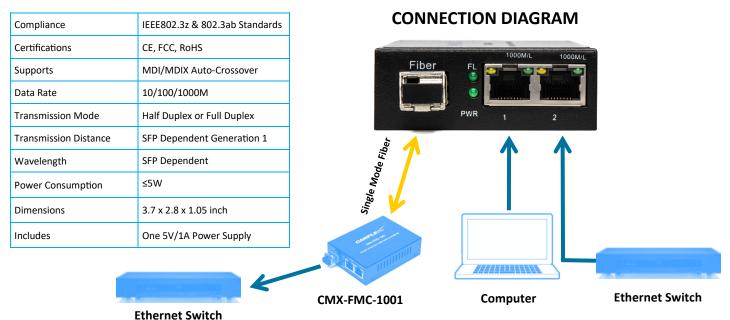

## **SAFETY PRECAUTIONS**



- 1. To prevent fire or shock hazard, do not expose this equipment to high humidity and/or dust. Do not use in an unprotected outdoor installation nor any area classified as overly damp.
- 2. The temperature for installation should be kept between 32°F to 140°F (0°C to 60°C). Avoid direct sunlight exposure or extreme changes of temperature over a short period of time.
- 3. Do not disassemble the unit or place it on an unstable base.
- 4. Do not drop the unit and avoid heavy impact.
- 5. This unit should not be permanently installed unless proper ventilation is provided. Any enclosure openings must not be blocked or covered as they protect the unit from overheating.
- 6. Before cleaning, turn off the power and unplug the unit from all connections. Use a damp cloth. Do not use liquid or aerosol cleaners.
- 7. Do not overload outlets and extension cords as this may result in a risk of fire or electric shock.
- 8. Enclosure entry is dangerous. Never push objects of any kind, including liquids, into this unit through openings as they may touch dangerous voltage points or short-out parts that could result in a fire or electric shock.
- 9. Do not attempt to open or service this unit yourself as opening or removing covers may expose you to dangerous voltage and other hazards.
- 10. There are no user-serviceable parts inside the unit. If the unit requires service contact your authorized dealer, or an authorized repair service company.