

HF-OCSMPTE-BP3


opticalCON DUO SMPTE Chassis with Pre-wired Copper to BP3 Style
6-pin AMP Connector - NO FIBER

Features:

- Neutrik opticalCON Chassis with Protective Rubber Dustcap
- Pre-wired Copper
- "BP3" Style 6-Pin AMP Connector
- Fiber Optic Assemblies 100% Tested for Attenuation and Back Reflection
 - **No Fiber - Power Conductors Only**

Specifications:

- **Neutrik NO2-4FDW-1-A opticalCON DUO Chassis Mount:**
 - Contact resistance: < 7 mΩ
 - Dielectric strength: 1,5 kVdc
 - Insulation resistance: > 2 GΩ (initial)
 - Rated current per contact: 6 A
 - Rated voltage: < 50 V (1)
 - Ground contact: Faston 2.8 x 0.5
 - Insertion force: < 45 N
 - Withdrawal force: < 45 N
 - Lifetime (typ.): 5000 mating cycles
 - Locking force: 1000 N
 - Locking device: Push-Pull
 - Mounting direction: Front mounting
 - Chassis shape: D
 - Contacts: Bronze (CuSn6)
 - Flammability: UL 94 V-0
 - Temperature range: 40°F - 167°F (-40°C to +75 °C)
 - Insertion loss: < 0.4 dB / connection
 - Optical connector: LC-Duplex Feedthrough

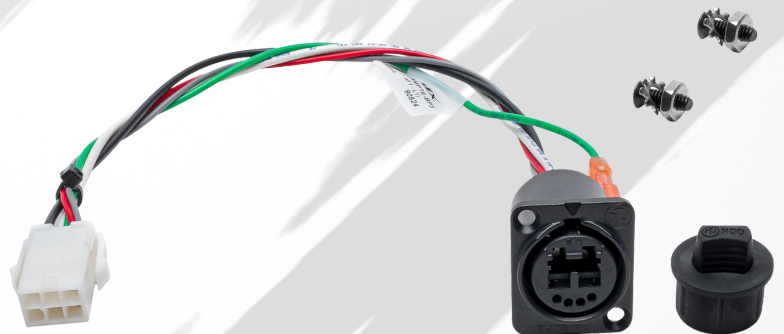

Commitment to Engineering Excellence

Our objective is to maintain engineering excellence in fiber optic cable and transport system manufacturing with a 100% inspection and zero-defect policy performed by trained and certified assemblers, as well as an R&D laboratory dedicated to the latest technology compliance testing. We strive for exceptional quality every day to ensure your confidence in our products and in our commitment to your success.